

Area of Operation **VI** - Task **C**

Change of Airspeed in Straight/Level and Turning Flight (Instrument)



Key References:

- Instrument Flying Handbook

Content



1. Introduction
2. Instruments Overview
3. Learning Method: Control & Performance
4. Learning Method: Primary & Supporting
5. General Procedure
6. Crosscheck and Interpretation
7. Increase of Airspeed
8. Decrease of Airspeed
9. Maintaining Standard Rate
10. Partial Panel
11. Common Errors

1. Introduction

- **What:** Attitude instrument flying is the control of an aircraft's spatial position by using instruments rather than outside visual references
- **Why:** Attitude instrument flying is the basis for flying under IMC
- **Attitude Instrument Flying:**
 - **Your Senses Cannot be Trusted** → human perception is misleading without visual references
 - **Do not fly VFR into IMC** → If it happens, you should make an 180° turn and return to visual conditions
 - **Trust your Instruments** if no visual conditions
- **Standard (ACS):**
 - ➔ ○ Altitude **±100ft**, Heading **±10°**, Airspeed **±10 kts**, Bank **±5°**



2. Instruments Overview

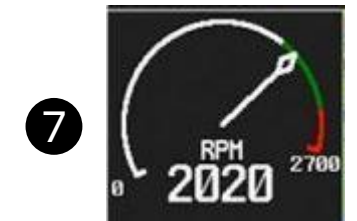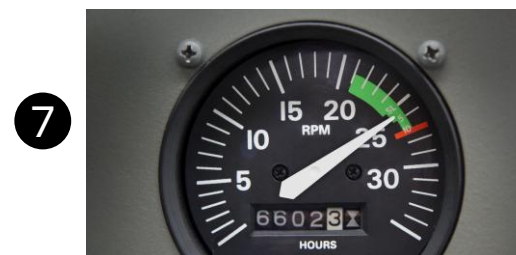

3. Learning Method: Control & Performance

Attitude + Power → Drives Performance

1. Control


- Attitude Indicator (Pitch + Bank)
- Power Indicator (Tachometer/Manifold)

2. Performance

- Airspeed Indicator
- Altimeter
- Vertical Speed Indicator
- Heading Indicator
- Turn Coordinator

3. Navigation

- Course, Range, Glide Slope → GPS, VOR, DME, ILS

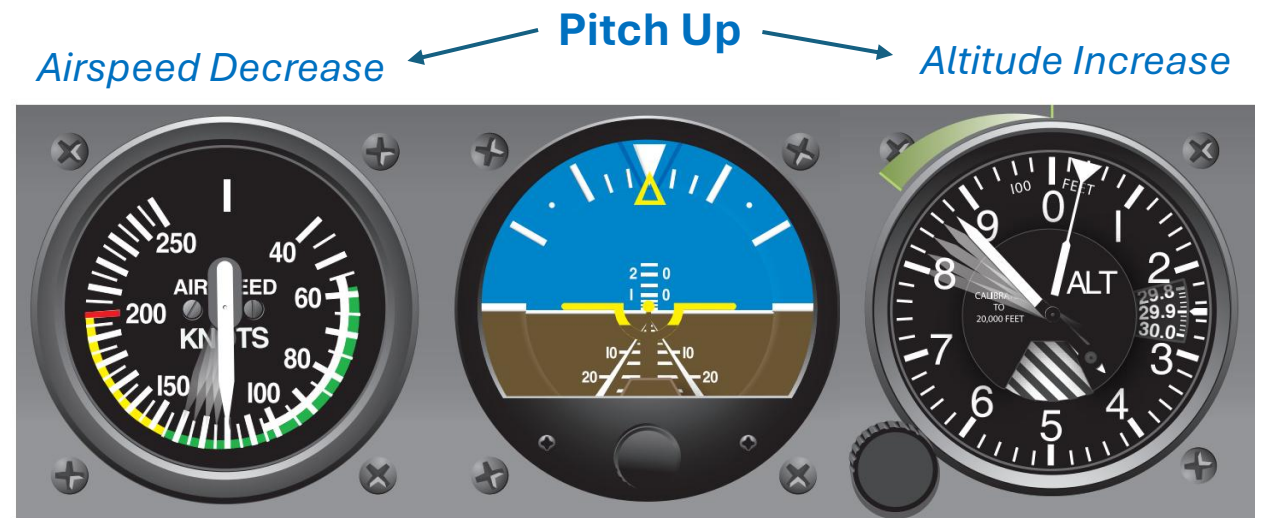

4. Learning Method: Primary & Supporting

- **Primary Instrument** → the one that gives **the most pertinent information** for a particular maneuver
 - **Pitch:** Attitude Indicator, Altimeter, Airspeed Indicator, Vertical Speed Indicator
 - **Bank:** Attitude Indicator, Heading Indicator, Turn Coordinator
 - **Power:** Airspeed Indicator, Tachometer
- Primary and Supporting instruments changes depending on the maneuver

Maneuver		Pitch		Bank		Power	
		Primary	Supporting	Primary	Supporting	Primary	Supporting
Straight and Level	Adjusting Speed	Alt	Attitude, VSI	Heading	Attitude, TC	Tachometer	Airspeed
	Maintain					Airspeed	Tachometer
Climbs/Descent	Entry	Attitude	Airspeed, Alt, VSI	Heading	Attitude, TC	Tachometer	
	Maintain Speed	Airspeed					
	Maintain Rate	VSI	Air, Att, Alt				
Turns	Entry	Alt	Attitude, VSI	Attitude	TC, Heading	Airspeed	Tachometer
	Maintain			TC	Attitude, Hdg		

5. General Procedure

1. Establish


- Attitude Indicator for **Pitch + Bank**
- Throttle for **Power**

2. Trim

- Trim until control pressures are neutralized
- Do not attempt to control pitch using trim, use yoke first, then add Trim to release pressure

3. Crosscheck & Adjust

- Crosscheck the performance instruments to determine if the desired performance is being obtained
- Repeat/correct it until almost no control inputs are needed
 - ✓ Restrict pitch changes to 1 bar or ½ bar width movements
 - ✓ Use a bank angle that approximates the degrees to turn, not to exceed 30°



6. Crosscheck and Interpretation

- **Crosscheck:** Continuous logical observation of instruments for attitude and performance information
 - Most popular: “Select Radial Crosscheck” → **Attitude indicator** is the **Hub** and is checked before each instrument
- **Interpretation:** Based on what you see, understand what is happening w/ the aircraft and take proper actions



Glass Cockpit



Classic 6-Pack

7. Increase of Airspeed

- ① Apply desired **power** and adjust the airplane **attitude** (nose on the horizon and wings level)
- ② Verify performance instruments (scan all). **Primary** instruments will mostly be used

Establish

- Bank/Pitch first (if needed)
- Increase Power
- Slightly reduce pitch (yoke pressure)

Trim

Maintain Pitch

- Pitch = On Horizon
- Altitude = Constant
- VSI = 0
- Airspeed = Constant Cruise

Maintain Bank

- Bank & Heading = as desired
- TC = Coordinated

Cross check & Adjust

Approaching the desired speed,
decrease power to maintain
the desired speed



8. Decrease of Airspeed

- ① Apply desired **power** and adjust the airplane **attitude** (nose on the horizon and wings level)
- ② Verify performance instruments (scan all). **Primary** instruments will mostly be used

Establish

- Bank/Pitch first (if needed)
- Decrease Power
- Slightly increase pitch (yoke pressure)

Trim

Maintain Pitch

- Pitch = On Horizon
- Altitude = Constant
- VSI = 0
- Airspeed = Constant Cruise

Maintain Bank

- Bank & Heading = as desired
- TC = Coordinated

Cross check & Adjust

Approaching the desired speed,
increase power to maintain
the desired speed




9. Maintaining Standard Rate

- **Bank Angle:**

- The bank necessary for a specific rate of turn depends on airspeed
- Higher Airspeed → Higher Bank Angle (to maintain same rate-of-turn)

- **Procedure**

- Increase Airspeed:
 - *Increase Power*
 - *Adjust pitch (lower) and bank angle (more)*
 - *Cross reference Rate of Turn, Altitude, Airspeed*
- Decrease Airspeed:
 - *Decrease Power*
 - *Adjust pitch (higher) and bank angle (less)*
 - *Cross reference Rate of Turn, Altitude, Airspeed*

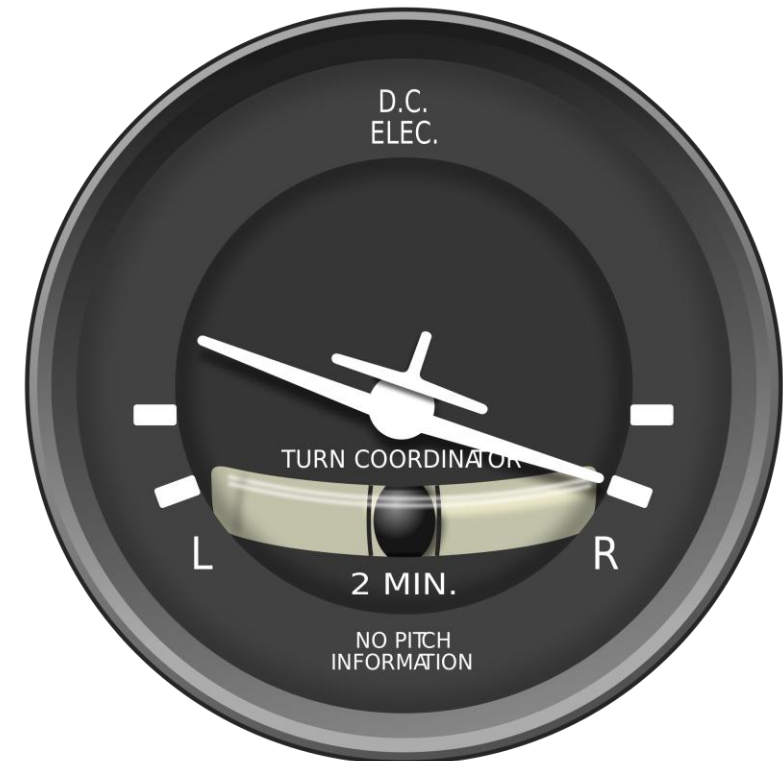

10. Partial Panel

Loss of Gyroscopic / AHRS Instruments

- Still have Altimeter, Airspeed Ind, Turn Coordinator (if 6-pack), VSI and Magnetic Compass

If backup available, use backup, otherwise:

- **Pitch**
 - Primary: Altimeter
 - Supporting: VSI
- **Bank (if straight & level)**
 - Primary: Compass
 - Supporting: Turn Coordinator (if avail)
- **Bank (if turning)**
 - Primary: Turn Coordinator (if avail)
 - Supporting: Compass



11. Common Errors

1. Errors during instrument cross-check
 - **Fixation:** staring at a single instrument
 - **Omission:** skipping an instrument from the crosscheck (e.g. slip/skid indicator)
 - **Emphasis:** spending more time in a single instrument (bias towards a specific instrument)
2. Improper instrument interpretation
3. Improper control applications
4. Failure to establish proper pitch, bank, or power adjustments during altitude, heading, or airspeed corrections
5. Faulty trim procedure

Questions?

